

Instruction Manual

TECHNICAL SPECIFICATION

Model Number	F51100SM	F51300SM
Wattage	10.5W	10.5W
Voltage	220-240V~	220-240V~
Frequency	50/60Hz	50/60Hz
Power Factor	>0.5	>0.5
IP Rating	IP66	IP66
IK Rating	IK10	IK10

CAUTIONS

- Read the entire manual carefully before installation and operation.
- It is recommended that the installation or maintenance be performed by a licensed and qualified electrician.
- DO NOT disassemble the luminaire. Doing so may result in luminaire damage or malfunction.
- Switch off the power source before installation, replacement and cleaning.
- Wearing gloves during installation is suggested for keeping the luminaire in the best condition.









- Before replacement of luminaire, turn off and allow them to cool down. Heat-resistant gloves are mandatory when handling the luminaire.
- The minimum safety distance from the illuminated object is 0.1m.
- The manufacturer accepts no liability for any damage resulting from the misuse of the luminaire or from when it is used with inappropriate equipment.
- Consult your dealer if you have any enquiries.
- Caution to the risk of electric shock during installation or maintenance.

ATTENTION

- Instant start is allowed.
- Designed for outdoor application.
- The operating temperature of the luminaire is -30° C to +40° C.

- The screws and cover should be installed properly to ensure the waterproof protection.


PART LIST

A1	M4.5 screw	A2	Screw raw plug	A3	Theft-proof screw	A4	Theft-proof screw driver	A5	M3 screw	A6	Wire bushing	A7	Cable gasket	A8	Rubber ring
															
	4 pcs	4 pcs	4 pcs	1 pcs	2 pcs	1 pcs	1 pcs	4 pcs							


Installation

Please refer to the diagram before installation.



- Remove the ring, cover and light source plate for wiring. DO NOT touch the LED chip on the light source plate.

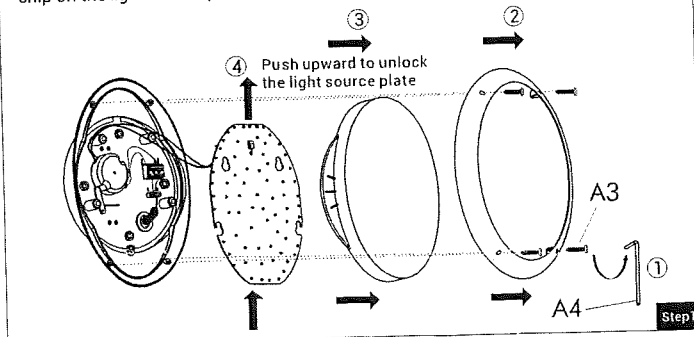

- Put the light source plate back on one of the studs to ensure the light source plate will not dangling freely and prevent wire damage during installation.
- Secure the cable gasket (A7) into the cable entry hole. Pass the power cable through the cable gasket and fix the power cable with M3 screws (A5) and wire bushing (A6).

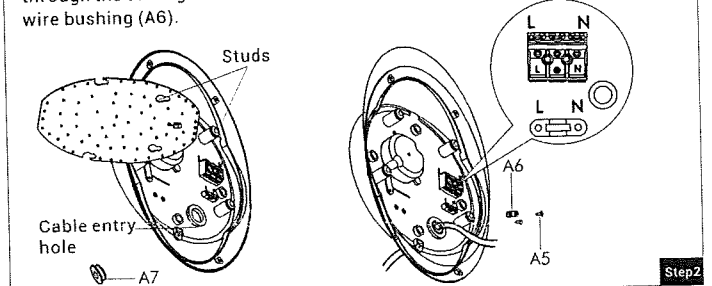


- Secure the luminaire to the wall with the M4.5 screw (A1), rubber ring (A8) and the screw raw plug (A2). The screws and cover should be installed properly to ensure the waterproof protection.

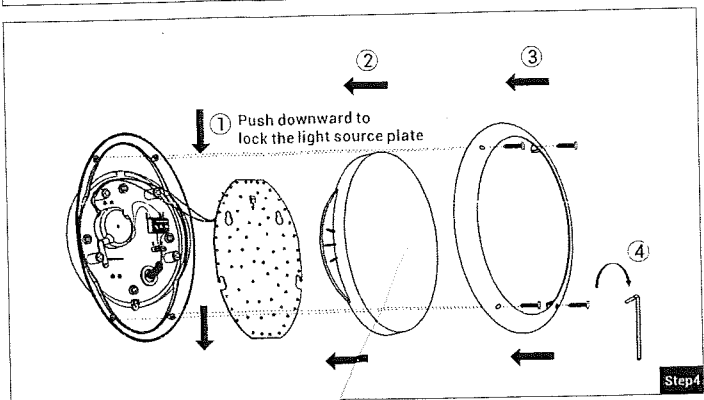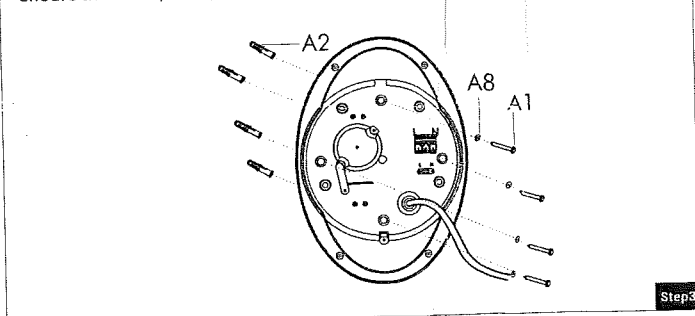

Correct Disposal of This Product

This marking indicates that this product should not be disposed with other household wastes throughout the EU. To prevent possible harm to the environment or human health from uncontrolled waste disposal, recycle it responsibly to promote the sustainable reuse of material resources. To return your used device, please use the return and collection systems or contact the retailer where the product was purchased. They can take this product for environmental safe recycling.

NEONLITE ELECTRONIC & LIGHTING (HK) LTD.
31/F, AIA Kowloon Tower, Landmark East, 100 How Ming Street,
Kwun Tong, Kowloon, Hong Kong



8010G0108B

