


HIGH POWER SINGLE COLOUR LED FLEXI STRIP Installation Instructions

PLEASE READ THESE INSTRUCTIONS CAREFULLY BEFORE INSTALLATION
 LEAVE A COPY FOR THE USER / MAINTENANCE ENGINEER FOR FUTURE REFERENCE

Important Notes


- Only qualified electricians should install this luminaire
- Ensure you are using LED strip from the same Lot & Tone where consistent colour is required - Refer to label on reel
- The LED Strip operates at 24V DC
- Before commencing installation or maintenance, ensure electricity is switched off at the mains.
- Ensure that all electrical connections are tight with no loose strands, including factory connections.
- Suitable for mounting on normally flammable surfaces
- Constant voltage drivers and parallel connections must be used.

		Single Colour LED Flexi Strip
Model: F1-22-28-2-60-F10		
Input: 24VDC	Colour: Cool White	
Qty: 5M	LED/Metre: 60pcs	
Lot:	Tone:	


Technical Characteristics

Model No.	Colour	Input (V)	LED/ Meter (Pcs)	Power/ Meter (W)	Dimensions LxW (mm)	Length/ Cutable Unit (mm)
F1-22-28-2-60-F10	Cool White 6100K	DC 24V	60	14.4	5000 x 10	100
C3-22-28-2-60-F10	Warm White 3300K	DC 24V	60	14.4	5000 x 10	100

Dimensions

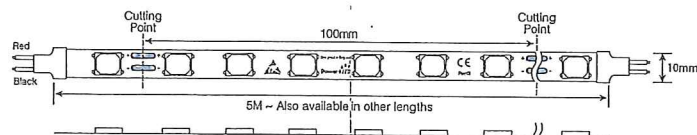

Wiring Diagram

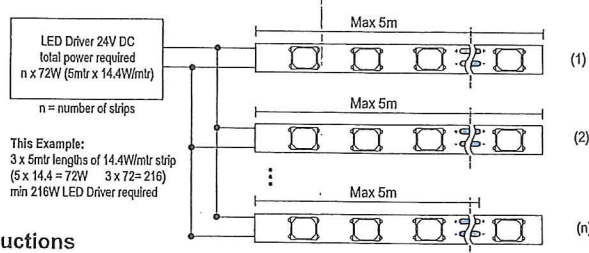

Installation Instructions

- To install the LED Driver please refer to the installation instructions supplied with the LED Driver.
- Isolate from the mains supply before installation or maintenance.
- Ensure the surface that the LED strip will be applied to is clean and free from grease.
- Peel off the backing tape and fix LED strip into the required position using the self adhesive backing.
- The LED strip may be cut to length with cut points every 100mm.
- Connect the strip to the 24V LED Driver ensuring that the polarity is correct:
 Red +ve (positive)
 Black -ve (negative)

