

MALO INTEGRATED LED BATTEN

PART OF THE MEGAMAN FIXTURES RANGE

MEGAMAN®

3yr
WARRANTY

MALO

True replacement for traditional T5 and T8 fluorescent tubes.

FEATURES


- Integrated LED batten
- Available in a range of sizes and wattages
- Integrated driver
- Cable entries at rear and both ends
- Permanent live option
- Two concealed surface mounting clips
- 110° beam angle
- L90 at 25000 hours, 50000 hours rated life

BENEFITS

- Ideal alternative to T5 and T8 linear fluorescent batten luminaires
- Perfect for a number of different applications and spaces
- Simple installation and easy maintenance
- Facilitates different wiring options and continuous runs
- Permanent live to facilitate the use of a non-maintained emergency luminaire
- Enhanced product appearance
- Wide and even light distribution
- Reduced maintenance costs

APPLICATIONS

- Residential/Commercial lighting
- General amenity lighting
- Staircases
- Corridors
- Under cabinet
- Malo Integrated LED Batten

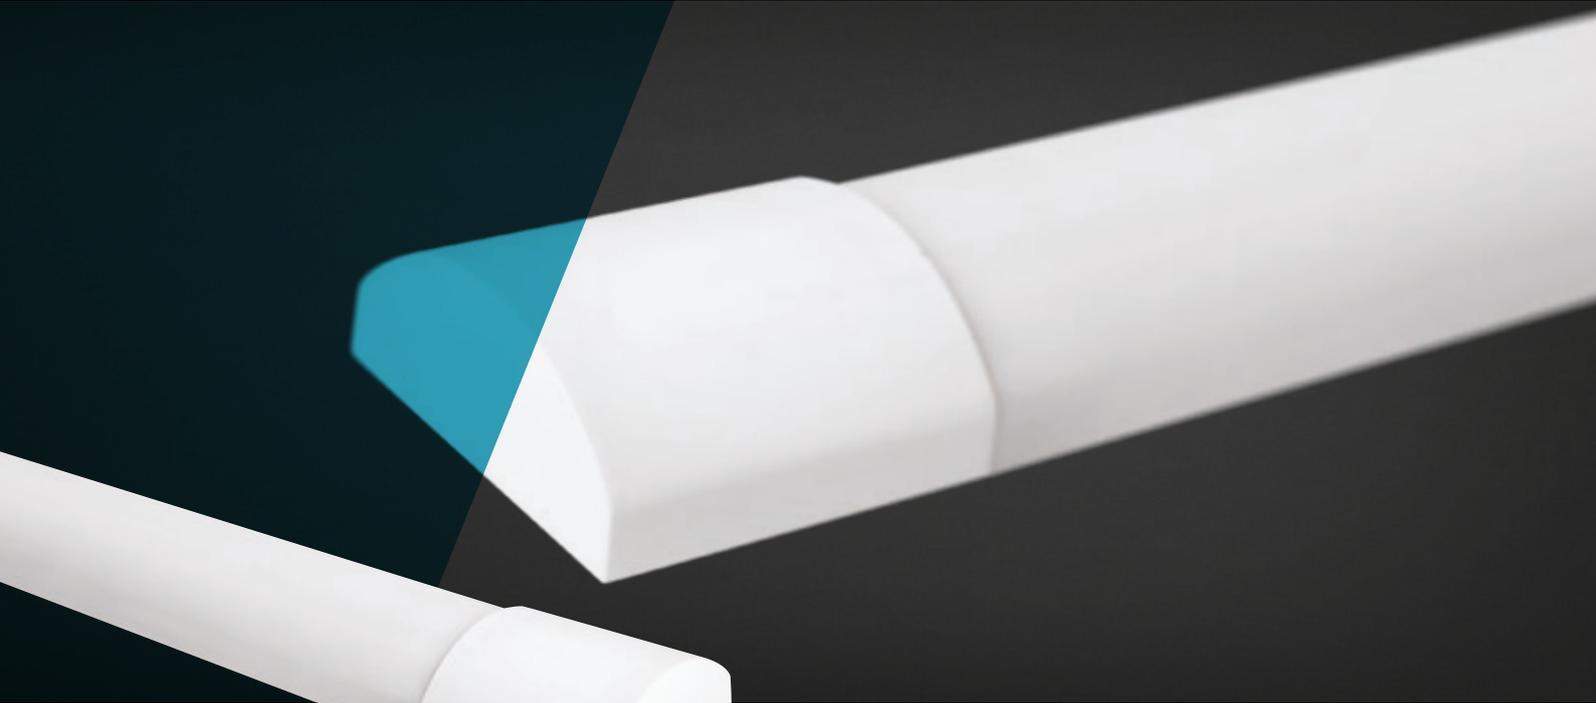

SPECIFICATION






MALO INTEGRATED LED BATTEN

UK Order Code >	180190	180195	180200	180202	180210	180215
Watts	15W	15W	35W	35W	42W	42W
Colour Temp (K) /CRI	3000 / 80	4000 / 80	3000 / 80	4000 / 80	3000 / 80	4000 / 80
Lumens (lm)	1500	1500	3600	3600	4500	4500
Candelas (cd)	400	400	1100	1100	1400	1400
Dimmable	N	N	N	N	N	N
Hrs Lamp Life (L70)	50,000	50,000	50,000	50,000	50,000	50,000
Hrs Lamp Life (L90)	25,000	25,000	25,000	25,000	25,000	25,000
Beam Angle	110°	110°	110°	110°	110°	110°
Weight (g)	386	386	730	730	971	971
Dimensions (L x W x D mm)	600x75x39	600x75x39	1200x75x39	1200x75x39	1500x75x39	1500x75x39

Operating temperature -30°C to +40°C

FIB70000V1-PL
FIB70100V1-PL
FIB70200V1-PL

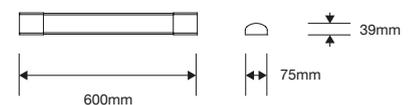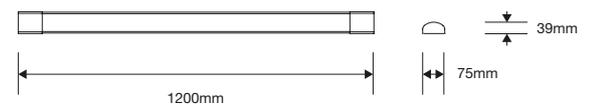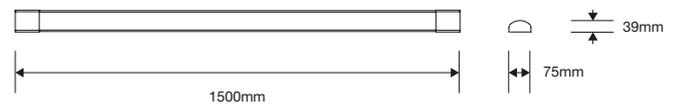

* Maximum output from highest spec lamp/module in range.
* Lamps are tested to both L70 and L90 standards. Figure represents L70.

For technical specification and photometric data please refer to the website.