

# MEGAMAN® MALO Integrated LED Batten

FIB70000v0-pl/FIB70000v1-pl/FIB70100v0-pl/FIB70100v1-pl/FIB70200v0-pl/FIB70200v1-pl







MEGAMAN®

## Instruction Manual

### TECHNICAL SPECIFICATION

Model Number	FIB70000v0-pl	FIB70000v1-pl	FIB70100v0-pl	FIB70100v1-pl	FIB70200v0-pl	FIB70200v1-pl
Wattage	9W	15W	25W	35W	33W	42W
Voltage	220-240V~	220-240V~	220-240V~	220-240V~	220-240V~	220-240V~
Input current	43mA	72mA	121mA	169mA	159mA	203mA
Frequency	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
Power factor	>0.9	>0.9	>0.9	>0.9	>0.9	>0.9
IP Rating	IP20	IP20	IP20	IP20	IP20	IP20
Length	600mm	600mm	1200mm	1200mm	1500mm	1500mm

### PART LIST

A1	A2	A3	A4	A5	A6
					
2 PCS	2 PCS	2 PCS	4 PCS	2 PCS	4 PCS

### CAUTIONS



- Read the entire manual carefully before installation and operation.
- It is recommended that the installation or maintenance be performed by a licensed and qualified electrician.
- Before installation, replacement and cleaning of the luminaire, turn it off and allow it to cool down. Heat-resistant gloves are mandatory when handling the luminaire.
- DO NOT disassemble the luminaire. Doing so may result in lamp damage or malfunction.

- The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.
- Caution to the risk of electric shock during installation or maintenance.
- The manufacturer accepts no liability for any damage resulting from the misuse or modification of the luminaire.
- Refer to [www.megaman.cc](http://www.megaman.cc) for a full list precautions and consult your dealer if you have any enquiries.

### ATTENTION

- The operating temperature is -30°C to +40°C.
- It is recommended to use 3 x 1.0mm² to 3 x 2.5mm² power cable.

## Connection

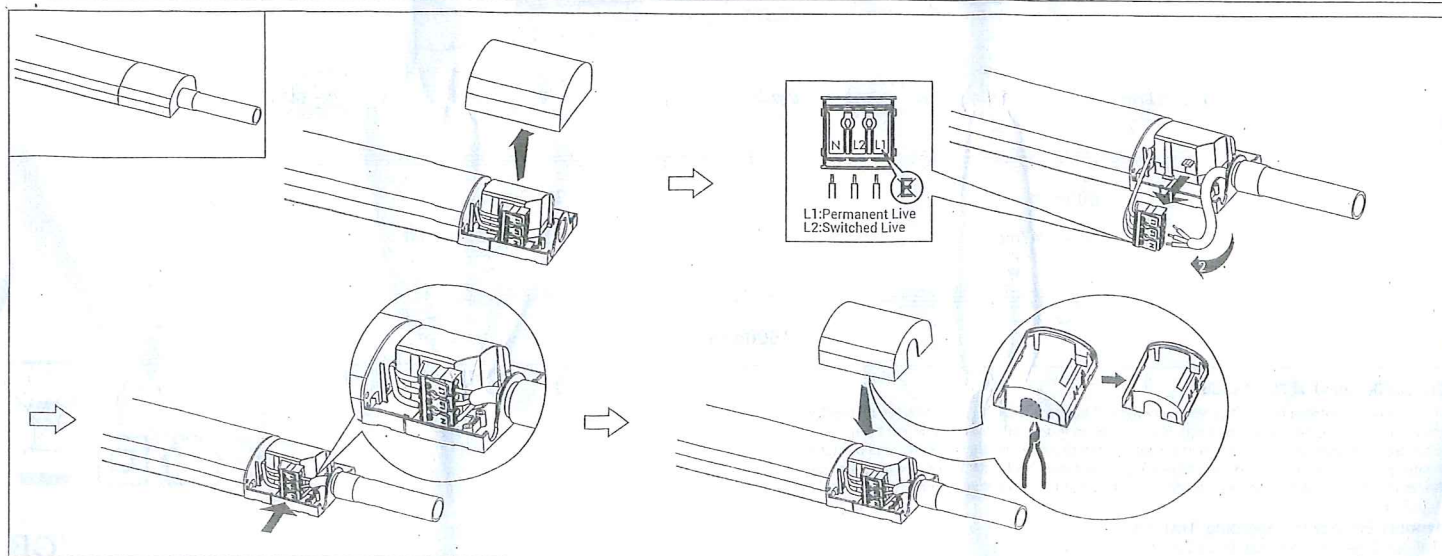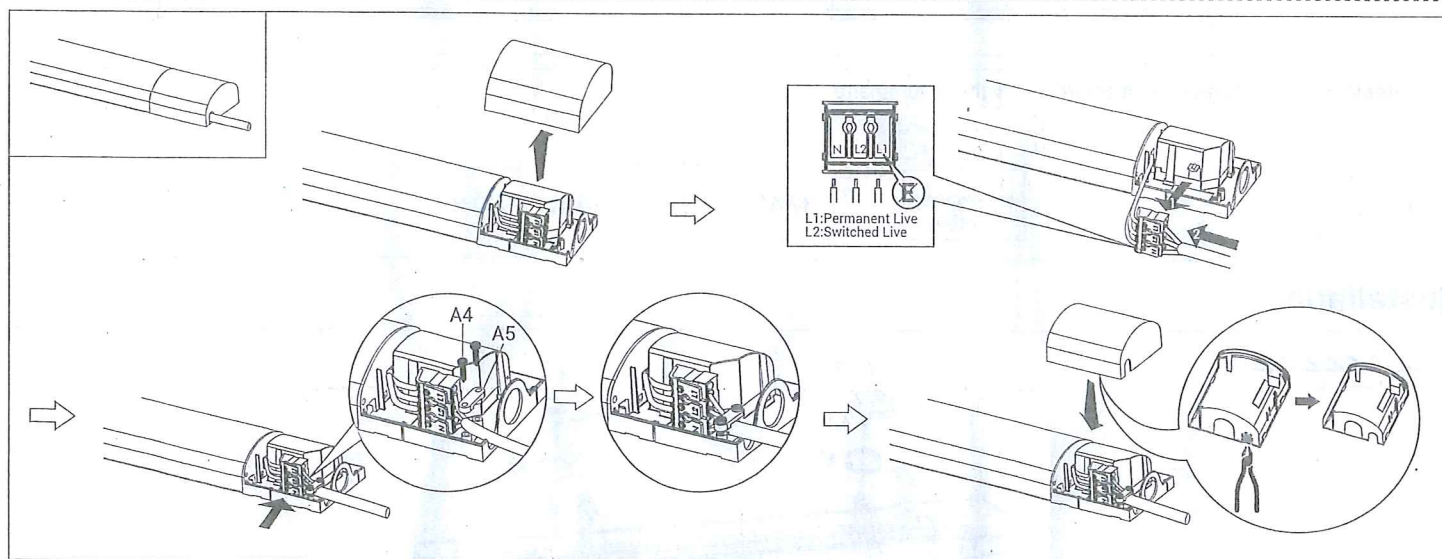


# MEGAMAN® MALO Integrated LED Batten

FIB70000v0-pl/FIB70000v1-pl/FIB70100v0-pl/FIB70100v1-pl/FIB70200v0-pl/FIB70200v1-pl

MEGAMAN®


## Connection

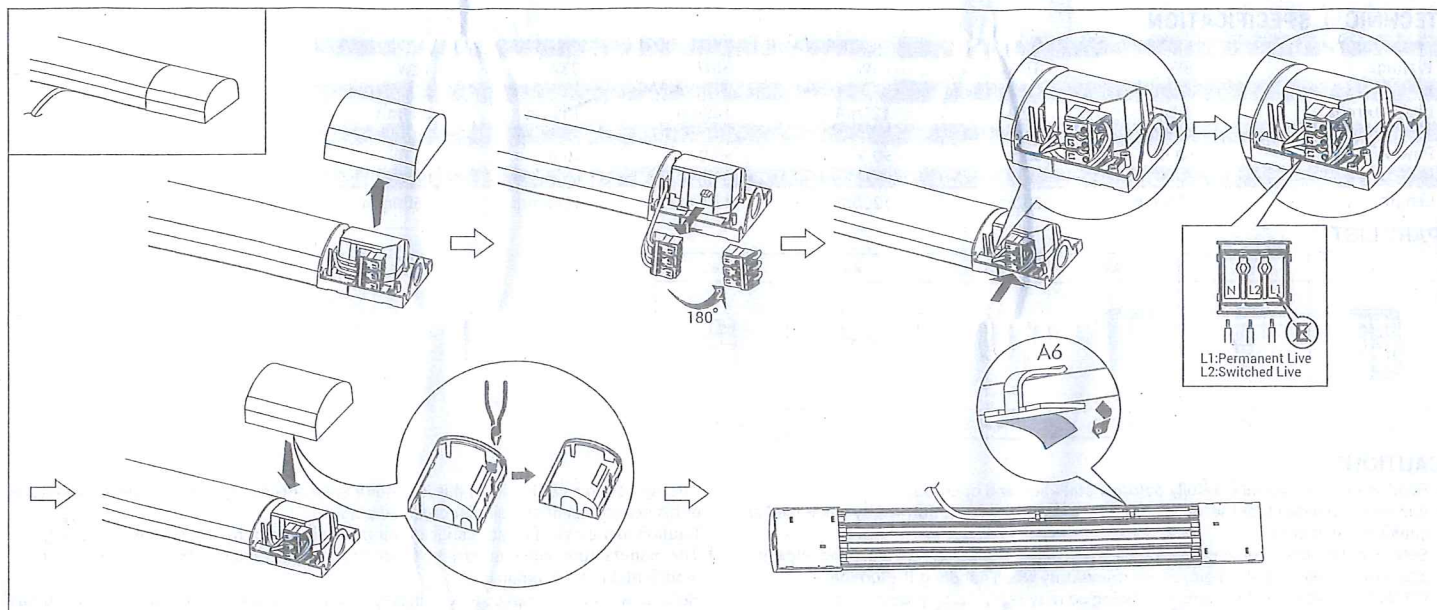


Max. 6A

220~240V~

Suggested wiring diagram with emergency lighting luminaire

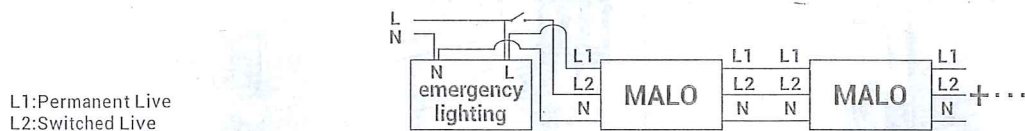

## Installation

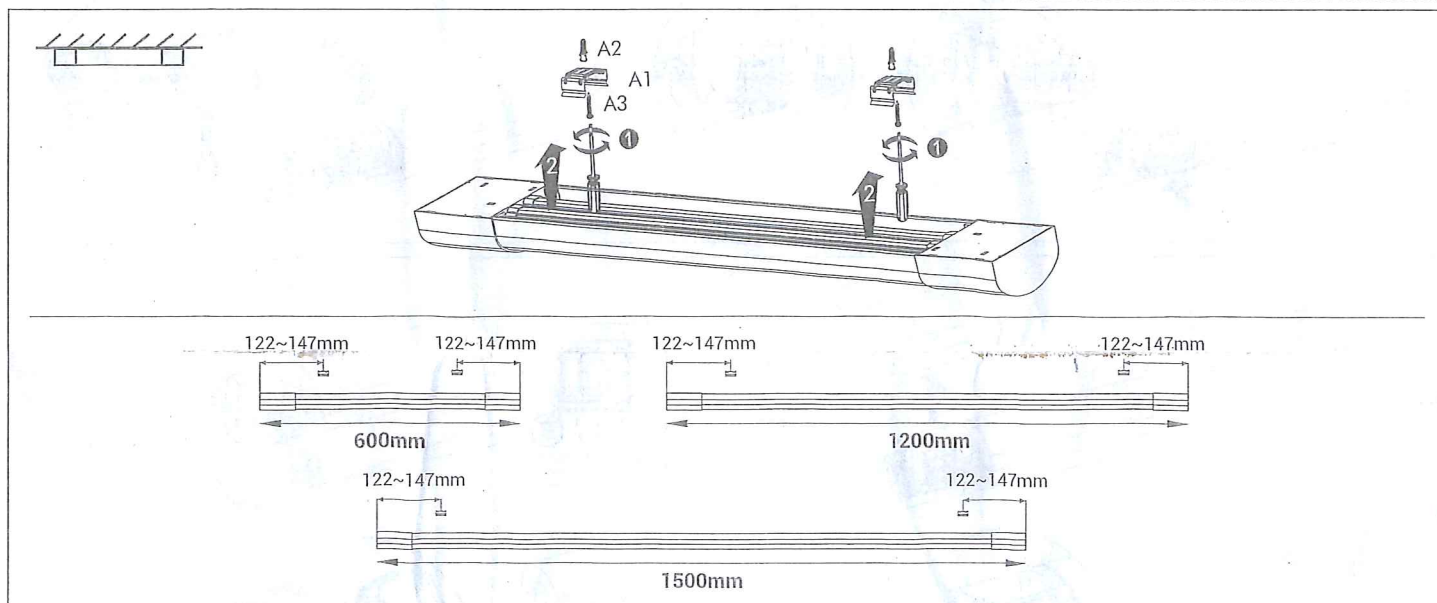

### Correct Disposal of This Product

This marking indicates that this product should not be disposed with other household wastes throughout the EU. To prevent possible harm to the environment or human health from uncontrolled waste disposal, recycle it responsibly to promote the sustainable reuse of material resources. To return your used device, please use the return and collection systems or contact the retailer where the product was purchased. They can take this product for environmental safe recycling.

Neonlite Electronic & Lighting (HK) Ltd.

31/F, AIA Kowloon Tower, Landmark East, 100 How Ming Street, Kwun Tong, Kowloon, Hong Kong.



8010G0247B

GB

MEGAMAN®