

# MEGAMAN® SIENA SR, MEGAMAN® SIENA FR

**MEGAMAN®**

Integrated LED Downlight

F54100RC-d+LA2506/F54200RC-d+LA2506/F54300RCv1+LA2506/F54600RC-d+LA2506/F54700RC-d+LA2506/  
F54800RCv1+LA2506

## Instruction Manual

### TECHNICAL SPECIFICATION

#### SIENA SR

Model Number	F54100RC-d+LA2506	F54200RC-d+LA2506	F54300RCv1+LA2506
Wattage	10.5W	16.5W	25.5W
Voltage	220-240~	220-240~	220-240~
Frequency	50/60Hz	50/60Hz	50/60Hz
Dimmable	100%-5%	100%-5%	No
Input Current	51mA	80mA	123mA
Power Factor	>0.9	>0.9	>0.9
IP Rating			

#### SIENA FR

Model Number	F54600RC-d+LA2506	F54700RC-d+LA2506	F54800RCv1+LA2506
Wattage	10.5W	16.5W	25.5W
Voltage	220-240~	220-240~	220-240~
Frequency	50/60Hz	50/60Hz	50/60Hz
Dimmable	100%-5%	100%-5%	No
Input Current	51mA	80mA	123mA
Power Factor	>0.9	>0.9	>0.9
IP Rating			

### CAUTIONS

- Read the entire manual carefully before installation and operation.
- It is recommended that the installation or replacement be performed by a licensed and qualified electrician.
- DO NOT disassemble the luminaire. Doing so may result in lamp damage or malfunction.
- Before replacement, installation and cleaning of the luminaire, turn it off and allow it to cool down. Heat-resistant gloves are mandatory when handling the luminaire.
- F54100RC-d+LA2506, F54200RC-d+LA2506, F54600RC-d+LA2506, F54700RC-d+LA2506 are compatible with BOTH Leading-edge and Trailing-edge Conventional Dimmers for 100-5% Linear Dimming.

- Please visit [www.megaman.cc](http://www.megaman.cc) for the list of compatible dimmers.
- The minimum safety distance from the illuminated object is 0.1m.
- The luminaire is not suitable for covering with thermally insulated material.
- The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent.
- Caution to the risk of electric shock during installation or maintenance.
- The manufacturer accepts no liability for any damage resulting from the misuse of the luminaire or from when it is used with inappropriate equipment.
- Consult your dealer if you have any enquiries.

### ATTENTION

- Instant start is allowed.
- Designed for indoor and outdoor application.

- The operating temperature of the luminaire is -30°C to +40°C.

## Instruction

**Cut-Out O:**

Model Number	Cut-Out (mm)
F54100RC-d+LA2506	125
F54300RCv1+LA2506	125
F54200RC-d+LA2506	150
F54700RC-d+LA2506	150
F54600RC-d+LA2506	200
F54800RCv1+LA2506	200

**Safety Distance:**

### Power Cord Preparation (for screw-in type)

0.5-2.5mm<sup>2</sup>  
For solid conductors  
0.5-2.5mm<sup>2</sup>  
For stranded wire ends  
0.5-2.5mm<sup>2</sup>  
For wire ends with ferrule

**Single Type Connection**  
Input Voltage  
220-240V~


### Correct Disposal of This Product

This marking indicates that this product should not be disposed with other household wastes throughout the EU. To prevent possible harm to the environment or human health from uncontrolled waste disposal, recycle it responsibly to promote the sustainable reuse of material resources. To return your used device, please use the return and collection systems or contact the retailer where the product was purchased. They can take this product for environmental safe recycling.

Neonlite Electronic & Lighting (HK) Ltd.

31/F, AIA Kowloon Tower, Landmark East, 100 How Ming Street,  
Kwun Tong, Kowloon, Hong Kong.

MEGAMAN®

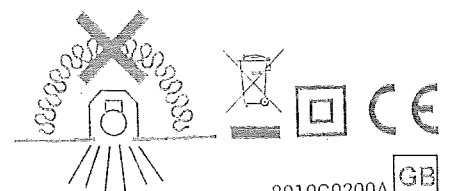

8010G0200A GB