

# MEGAMAN® TOTT

## Outdoor Integrated LED Floodlight

FFL70300v0/FFL70200v0/FFL70400v0

MEGAMAN®

### Instruction Manual

#### TECHNICAL SPECIFICATION

Series Name	TOTT S	TOTT M	TOTT L
Model Number	FFL70300v0	FFL70200v0	FFL70400v0
Wattage	9.5W	24W	45W
Input Current	46mA	116mA	217mA
Voltage	220-240V~	220-240V~	220-240V~
Frequency	50/60Hz	50/60Hz	50/60Hz
Power factor	>0.9	>0.9	>0.9
Size	W86 x L113 x H115 mm	W179 x L179 x H138 mm	W216 x L216 x H151mm
IP Rating	IP65	IP65	IP65


#### CAUTIONS

- Read the entire manual carefully before installation and operation.
- It is recommended that the installation or replacement be performed by a licensed and qualified electrician.
- DO NOT disassemble the luminaire. Doing so may result in lamp damage or malfunction.
- Switch off the power source before installation, replacement and cleaning.
- Wearing gloves during installation is recommended to ensure the luminaire is kept in the best condition.
- Before replacement of the luminaire, turn it off and allow it to cool down.
- The light source of this luminaire is not replaceable; when the light source reaches its end of life the whole luminaire shall be replaced.
- In case the external flexible power cord is damaged, the replacement should be handled by a licensed and qualified electrician for safety purpose.
- The manufacturer accepts no liability for any damage resulting from the misuse of the luminaire or from when it is used with inappropriate equipment.
- Consult your dealer if you have any enquiries.

#### ATTENTION

- The operating temperature of the luminaire is -30°C to +40°C.
- To optimise the waterproof performance, it is recommended to use oil resistant rubber cable(power cable), H07RN-F/2G1.5.

### Installation

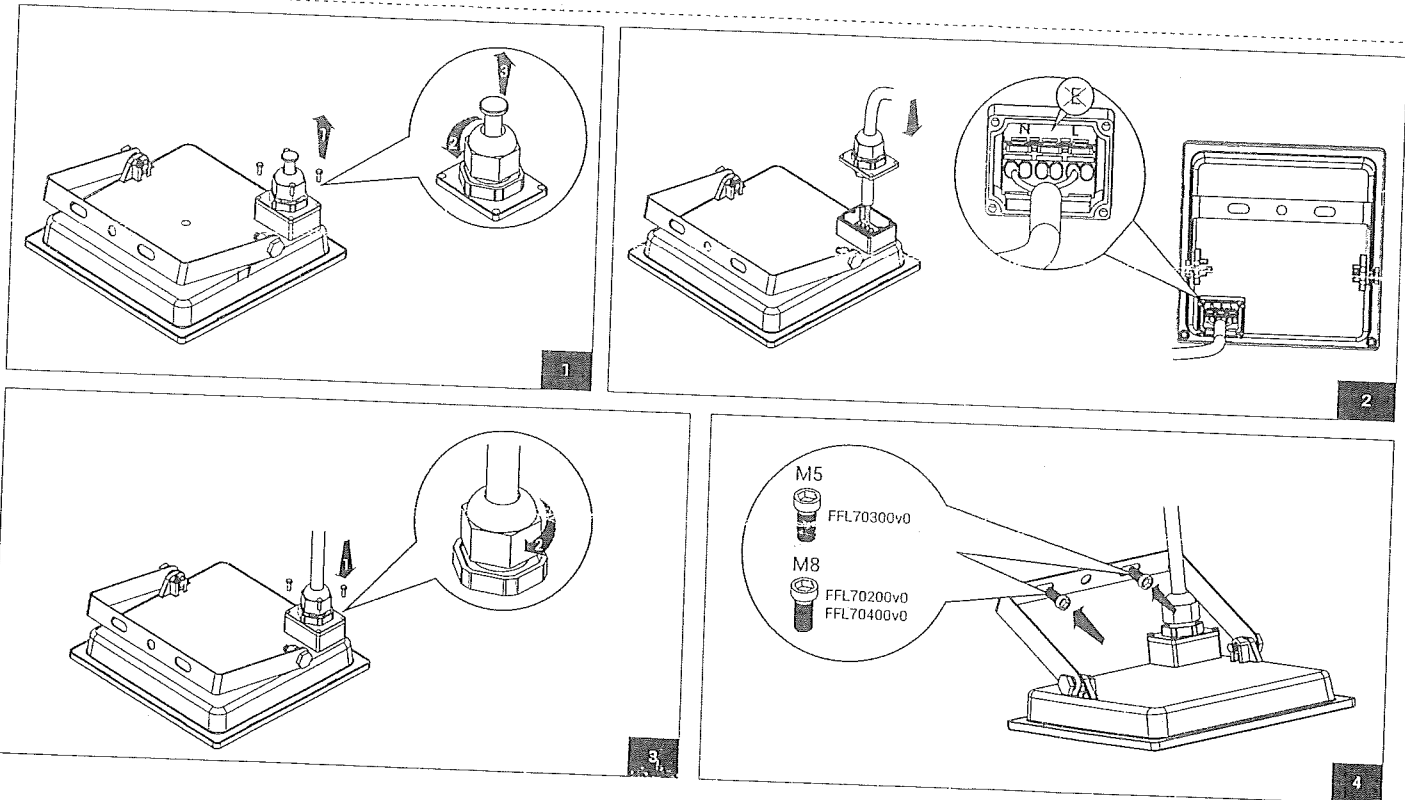


#### Correct Disposal of This Product

This marking indicates that this product should not be disposed with other household wastes throughout the EU. To prevent possible harm to the environment or human health from uncontrolled waste disposal, recycle it responsibly to promote the sustainable reuse of material resources. To return your used device, please use the return and collection systems or contact the retailer where the product was purchased. They can take this product for environmental safe recycling.

Neonlite Electronic & Lighting (HK) Ltd.

31/F, AIA Kowloon Tower, Landmark East, 100 How Ming Street, Kwun Tong, Kowloon, Hong Kong.



8010G0239A



MEGAMAN