


An exceptional LED lay-in fitting for use in high footfall applications where access is limited and maintenance difficult. Non dimming driver included.

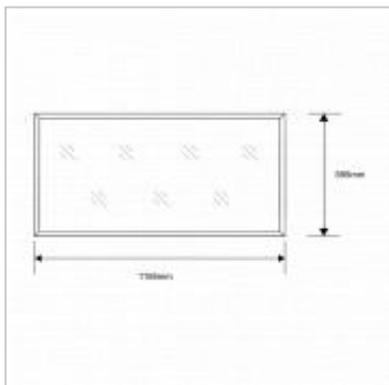

## BERTO BACKLIT TPa LED Panels 43W 4000K Non-Dim Driver

<b>UK Order Code</b>	711081
<b>International Code</b>	FPL71800v0-ex/ta
<b>Description</b>	BERTO BACKLIT TPa LED Panels 43W 4000K Non-Dim Driver
<b>Watts</b>	43W
<b>Colour Temp (K)</b>	4000K
<b>CRI</b>	80
<b>Lumens (lm)</b>	4600
<b>Dimmable</b>	No
<b>Beam Angle</b>	110°
<b>Hrs Lamp Life (max)</b>	50,000
<b>Dimensions (L x W x H mm)</b>	595x1195x33

Last modified: 2022-08-15 15:53:29.

View online at <https://www.megamanuk.com/products/essentials-led-fixtures/berto/711081/>