


The new generation GU10 emergency pack, TEMPUS® offers a simplistic and slim design with faster installation than the previous sausage pack model. In times of power failure, the TEMPUS® Emergency Pack will power MEGAMAN® TEMPUS® approved GU10s and our TEGO fully fire-rated downlight for a minimum of 3 hours.

COMPATIBLE WITH

- ALL MEGAMAN® GU10 LEDs
- TEGO FULLY FIRE-RATED LED DOWNLIGHT
- MILENA INTEGRATED LED DOWNLIGHT
- MILENALITE INTEGRATED LED DOWNLIGHT

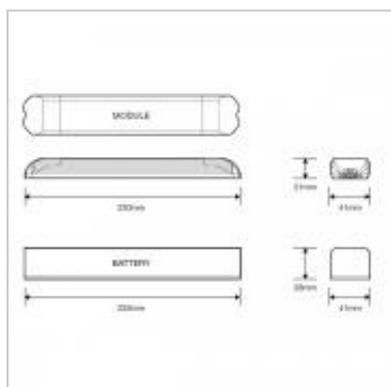

TEMPUS® GU10 & TEGO EMERGENCY PACK EMC Compliant

Product Code	EMG147247
Description	TEMPUS® GU10 & TEGO EMERGENCY PACK EMC Compliant
Order in	1
Watts	4-7W
Battery duration	3 hours
Charging Time	24 Hours
Supply Voltage	230Vac 50/60Hz
Supply Current	40mA maximum
Power Factor	0.35
LED Voltage (Vf)	Auot-detect 55v max
Ambient Temperature (ta)	0°C to +55°C
Maximum Case Temperature (tc)	+70°C
Battery Charge Current NiMH (4Ah)	200mA*
Initial Charge Period	24 Hours

View online at <https://www.megamanuk.com/products/tempus-emergency-lighting/emg147247/>

Fixing Centres

197mm

Last modified: 2022-04-05 22:08:15.

View online at <https://www.megamanuk.com/products/tempus-emergency-lighting/emg147247/>

Megaman (UK) Limited, Megaman House, 2 Quadrant Park, Mundells, Welwyn Garden City, Herts, AL7 1FS
Telephone: +44 (0) 1707 386000 , **Email:** sales@megamanuk.com **Website:** www.megamanuk.com

