

ESTELA RECESSED LED LOUVRE

PART OF THE MEGAMAN FIXTURES RANGE

MEGAMAN®

Extended Estela range!

New 6500K models

3yr
WARRANTY

ESTELA

New generation of modular luminaires with distinct appearance.

FEATURES


- Recessed integrated LED Louvre luminaire
- Available in square or rectangular variants, integrated with a driver
- I-beam construction at the back plate
- Louvre optics with UGR19
- 3 hour maintained emergency option available
- 90° beam angle
- L90 at 25,000hours, 50,000 hours rated life
- Up to 116 lumen per system watt

BENEFITS

- Perfect replacement to T5 and T8 fluorescent luminaires
- Mountable on both exposed T-bar and concealed T-bar ceilings
- I-beam design enhances structural integrity and reduces material used
- Reduces glare and increases visual comfort in working environments
- Consistent appearance across the lighting scheme
- Beam angle makes it ideal for general lighting use to compliment low glare lighting design
- Simple design minimising build-up of dust for easy maintenance
- Low maintenance and added cost savings
- Can be used as part of a Part L building compliance

APPLICATIONS

- Commercial/Retail Lighting
- Hotels
- Kitchens
- Corridors
- Stairwells
- Bathrooms (IP44)

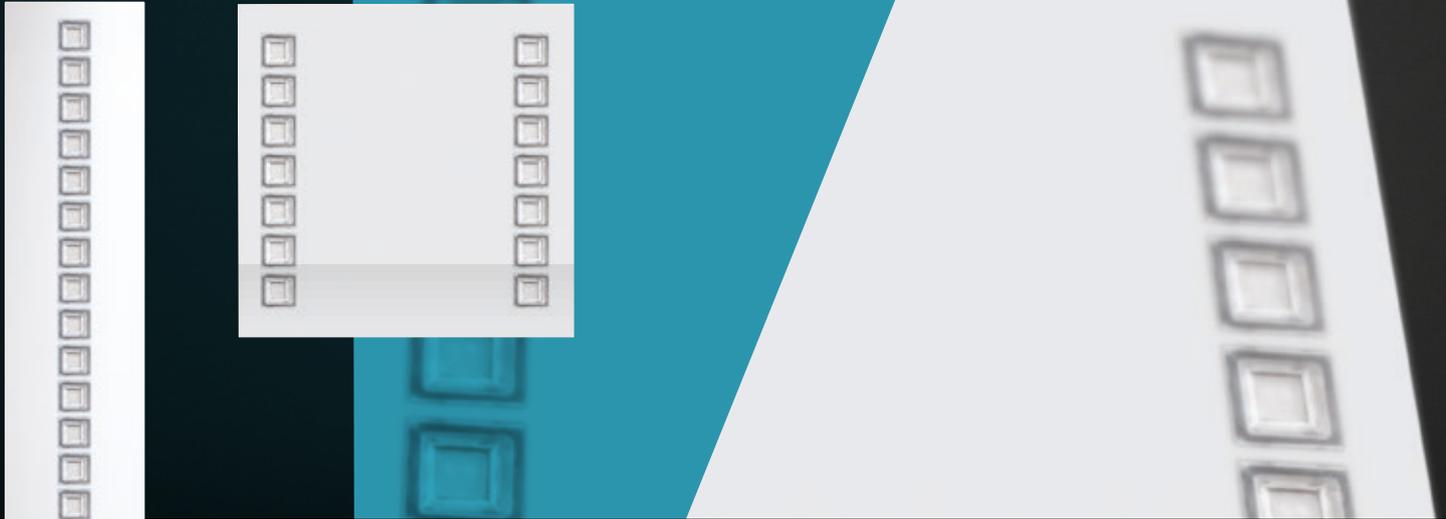


SPECIFICATION

- 3500⁺**
LUMENS
- 50,000⁺**
HOURS
- IP20**
RATED
- CLASS I**
RATED
- 19**
GLARE RATING


ESTELA RECESSED LED LOUVRE

UK Order Code >	519178	519186	519195	519197
Watts	30W	30W	30W	30W
Colour Temp (K) /CRI	4000 / 80	4000 / 80	6500 / 80	6500 / 80
Lumens (lm)	3500	3500	3500	3500
Candelas (cd)	2500	2500	2500	2500
Dimmable	N	N	N	N
Hrs Lamp Life (L70)	50,000	50,000	50,000	50,000
Hrs Lamp Life (L90)	25,000	25,000	25,000	25,000
Beam Angle	90°	90°	90°	90°
Weight (g)	3235	3236	3235	3236
Dimensions (LxWxD mm)	597x597x35	1197x 297x35	597x597x35	1197x 297x35
Shape	Square	Rectangular	Square	Rectangular

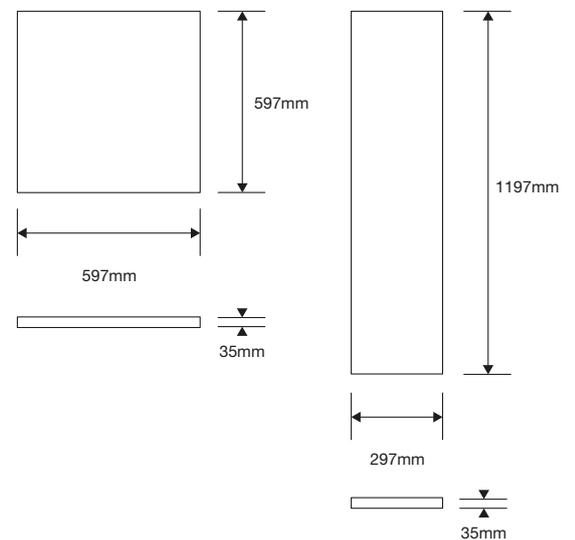

Operating temperature -30°C to +40°C

FPL62400v0+LD063
FPL62500v0+LD063
FPL62400v0
FPL62500v0

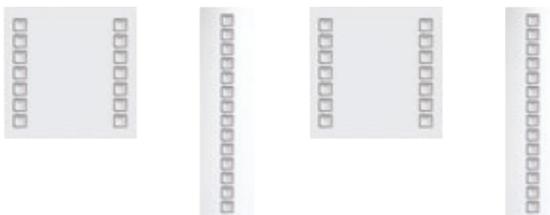

EMERGENCY CONVERSION

3 hour maintained emergency conversion available for Estela with a 10 day lead time. Contact our sales office for more info.

EMG519178M
EMG519186M
EMG519195M
EMG519197M



* Lamps are tested to both L70 and L90 standards. Figure represents L70.

For technical specification and photometric data please refer to the website.